

March 14, 2002

F 202.293.7860 www.sughrue.com

T 202.293.7060

Washington, DC 20037-3213

BOX PCT

Commissioner for Patents Washington, D.C. 20231

PCT/FR00/02516 -filed Septembet 12, 2000

Re:

Application of Dany RAY and Frank PLESSIS

A DISPENSER DEVICE HAVING A FITTED FIXING RING

Assignee: VALOIS S.A.

Our Ref: Q68978

Dear Sir:

The following documents and fees are submitted herewith in connection with the above application for the purpose of entering the National stage under 35 U.S.C. § 371 and in accordance with Chapter II of the Patent Cooperation Treaty:

☑ an English translation of the International Application.

☑ two (2) sheets of drawings.

☑ an English translation of Article 34 amendments (annexes to the IPER).

☑ a Preliminary Amendment

The Declaration and Power of Attorney, Assignment, will be submitted at a later date.

It is assumed that copies of the International Search Report, the International Preliminary Examination Report, and any Articles 19 amendments as required by § 371(c) will be supplied directly by the International Bureau, but if further copies are needed, the undersigned can easily provide them upon request.

The Government filing fee, after consideration of the Preliminary Amendment, is calculated as follows:

Total claims	1	l	2	0	=	 x	\$18.00	=	\$.00
Independent claims	•			3	=	x	\$84.00	=	\$.00
Base Fee	•							_	\$890.00
TOTAL FEE									\$890.00

A check for the statutory filing fee of \$890.00 is attached. You are also directed and authorized to charge or credit any difference or overpayment to Deposit Account No. 19-4880. The Commissioner is hereby authorized to charge any fees under 37 C.F.R. §§ 1.16, 1.17 and 1.492 which may be required during the entire pendency of the application to Deposit Account No. 19-4880. A duplicate copy of this transmittal letter is attached.

Priority is claimed from:

Country

Application No

Filing Date

France

99/11501

September 15, 1999

Respectfully submitted,

Robert J.) Seas,

Registration No. 21,092

RJS/rwl

CANNED, # 12

10/088050 JC13 Rec'd Parogrennsylvenie Avyng 2002

Sughrue
SUGHRUE MION, PILLO

March 14, 2002

F 202.293.7860

www.sughrue.com

BOX PCT

Commissioner for Patents Washington, D.C. 20231

PCT/FR00/02516 -filed Septembet 12, 2000

Re:

Application of Dany RAY and Frank PLESSIS

A DISPENSER DEVICE HAVING A FITTED FIXING RING

Assignee: VALOIS S.A.

Our Ref: Q68978

Dear Sir:

The following documents and fees are submitted herewith in connection with the above application for the purpose of entering the National stage under 35 U.S.C. § 371 and in accordance with Chapter II of the Patent Cooperation Treaty:

☑ an English translation of the International Application.

☑ two (2) sheets of drawings.

☑ an English translation of Article 34 amendments (annexes to the IPER).

☑ a Preliminary Amendment

The Declaration and Power of Attorney, Assignment, will be submitted at a later date.

It is assumed that copies of the International Search Report, the International Preliminary Examination Report, and any Articles 19 amendments as required by § 371(c) will be supplied directly by the International Bureau, but if further copies are needed, the undersigned can easily provide them upon request.

The Government filing fee, after consideration of the Preliminary Amendment, is calculated as follows:

Total claims	11	-	20	=	 x	\$18.00	=	\$.00
Independent claims	1	-	3	=	X	\$84.00	=	\$.00
Base Fee								\$890.00

TOTAL FEE \$890.00

A check for the statutory filing fee of \$890.00 is attached. You are also directed and authorized to charge or credit any difference or overpayment to Deposit Account No. 19-4880. The Commissioner is hereby authorized to charge any fees under 37 C.F.R. §§ 1.16, 1.17 and 1.492 which may be required during the entire pendency of the application to Deposit Account No. 19-4880. A duplicate copy of this transmittal letter is attached.

Priority is claimed from:

Country

Application No

Filing Date

France

99/11501

September 15, 1999

Respectfully submitted,

Robert J. Seas, Jr.

Registration No. 21,092

RJS/rwl

PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of

Dany RAY, et al.

PCT Appln. No.: PCT/FR00/02516

Confirmation No.: Not Yet Assigned Group Art Unit: Not Yet Assigned

Filed: March 14, 2002 Examiner: Not Yet Assigned

For: A DISPENSER DEVICE HAVING A FITTED FIXING RING

PRELIMINARY AMENDMENT

Commissioner for Patents Washington, D.C. 20231

Sir:

Prior to examination, please amend the above-identified application as follows:

IN THE CLAIMS:

Please enter the following amended claims:

- 3/ A fluid dispenser device according to claim 1, in which said body (10) also forms at least one outwardly-projecting bulge (13) situated below the collar (12), the ring (20) being disposed between the collar (12) and said at least one bulge (13) so that the ring is locked therebetween.
- 5/ A fluid dispenser device according to claim 3, in which the bulge (13) extends over the entire periphery of the body so as to from an outwardly projecting bead.
- 6/ A fluid dispenser device according to claim 3, in which a plurality of localized bulges (13) are provided that are distributed around the periphery of the body.
- 7/ A fluid dispenser device according to claim 1, in which the ring (20) is made of metal.

PRELIMINARY AMENDMENT Attorney Docket No. Q68978

REMARKS

Entry and consideration of this Amendment is respectfully requested.

Respectfully submitted,

Registration No. 21,092

SUGHRUE MION, PLLC 2100 Pennsylvania Avenue, N.W.

Washington, D.C. 20037-3213 Telephone: (202) 293-7060 Facsimile: (202) 293-7860

RJS/rw1

Date: March 14, 2002

3

10/088050 JC13 Rec'd PCT/PTC 14 IAR 2002

PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of

Dany RAY, et al.

PCT Appln. No.: PCT/FR00/02516

Confirmation No.: Not Yet Assigned Group Art Unit: Not Yet Assigned

Filed: March 14, 2002 Examiner: Not Yet Assigned

For: A DISPENSER DEVICE HAVING A FITTED FIXING RING

PRELIMINARY AMENDMENT

Commissioner for Patents Washington, D.C. 20231

Sir:

Prior to examination, please amend the above-identified application as follows:

IN THE CLAIMS:

Please enter the following amended claims:

- 3/ A fluid dispenser device according to claim 1, in which said body (10) also forms at least one outwardly-projecting bulge (13) situated below the collar (12), the ring (20) being disposed between the collar (12) and said at least one bulge (13) so that the ring is locked therebetween.
- 5/ A fluid dispenser device according to claim 3, in which the bulge (13) extends over the entire periphery of the body so as to from an outwardly projecting bead.
- 6/ A fluid dispenser device according to claim 3, in which a plurality of localized bulges (13) are provided that are distributed around the periphery of the body.
- 7/ A fluid dispenser device according to claim 1, in which the ring (20) is made of metal.

PRELIMINARY AMENDMENT Attorney Docket No. Q68978

8/ A fluid dispenser device according to claim 3, in which the ring (20) is made of plastic.

9/ A fluid dispenser device according to claim 1, in which the free top end (201) of the ring (20) is provided with an inside bevel (203) to make it easier for the ring (20) to pass over the bulge (13).

10/ A fluid dispenser device according to claim 1, in which the ring (20) is extended at its bottom end by a radial flange (21) serving to come into abutment against the neck of the receptacle with a gasket (3) being interposed.

PRELIMINARY AMENDMENT Attorney Docket No. Q68978

REMARKS

Entry and consideration of this Amendment is respectfully requested.

Respectfully submitted,

Registration No. 21,092

SUGHRUE MION, PLLC 2100 Pennsylvania Avenue, N.W. Washington, D.C. 20037-3213

Telephone: (202) 293-7060 Facsimile: (202) 293-7860

RJS/rwl

Date: March 14, 2002

3

PRELIMINARY AMENDMENT Attorney Docket No. Q68978

APPENDIX

VERSION WITH MARKINGS TO SHOW CHANGES MADE

IN THE CLAIMS:

The claims are amended as follows:

- 3/ A fluid dispenser device according to claim 1-or-2, in which said body (10) also forms at least one outwardly-projecting bulge (13) situated below the collar (12), the ring (20) being disposed between the collar (12) and said at least one bulge (13) so that the ring is locked therebetween.
- 5/ A fluid dispenser device according to claim 3-or-4, in which the bulge (13) extends over the entire periphery of the body so as to from an outwardly projecting bead.
- 6/ A fluid dispenser device according to claim 3-or 4, in which a plurality of localized bulges (13) are provided that are distributed around the periphery of the body.
- 7/ A fluid dispenser device according to <u>claim 1 any preceding claim</u>, in which the ring (20) is made of metal.
- 8/ A fluid dispenser device according to any one of claims claim 3-to 7, in which the ring (20) is made of plastic.
- 9/ A fluid dispenser device according to-any-preceding claim claim 1, in which the free top end (201) of the ring (20) is provided with an inside bevel (203) to make it easier for the ring (20) to pass over the bulge (13).
- 10/ A fluid dispenser device according to any preceding claim claim 1, in which the ring (20) is extended at its bottom end by a radial flange (21) serving to come into abutment against the neck of the receptacle with a gasket (3) being interposed.

2/px/>

A DISPENSER DEVICE HAVING A FITTED FIXING RING

5

10

35

The present invention relates to a fluid dispenser device designed to be mounted on the neck of a receptacle. The device comprises a dispensing member, such as a pump or a valve, and fixing means for fixing the dispensing member to the neck of the receptacle. In the fields of cosmetics, perfumes, or pharmaceuticals, it is frequent to use a pump or a valve mounted on a receptacle containing a fluid to be dispensed. To fix the pump or the valve to the neck of the receptacle, a fixing ring or turret is conventionally used that makes it possible both to take hold of the pump or of the valve, and also to fix it to the neck of the receptacle.

It is also known that the body of the pump or of the 15 valve may be provided with a collar which extends radially outwards. The collar is generally formed at the top end of the body of the pump or of the valve. conventional fixing means, the collar on the body is used to take hold of the pump or of the valve. When the 20 fixing means are made of metal, they are then in the form of a metal cap in which the collar of the body is To fix the pump or the valve to the neck of the receptacle, it is then necessary merely to crimp the cap to the outside of the neck of the receptacle. 25 fixing means are made of plastic, they are generally provided with a snap-fastening recess into which the collar of the body is inserted by force. To fix the ring made of plastic to the neck of the receptacle, the techniques of screwing or snap-fastening are generally 30 used.

Regardless of whether the fixing means are made of metal or of plastic, they form a recess for the collar of the body of the pump or of the valve, and they therefore extend over the top face of the collar. This gives rise to extra thickness at the top face of the collar, and it also gives rise to an increase in the working diameter of

the pump as mounted, because the fixing means extend around the collar.

5

10

15

20

25

30

35

Document US 4 446 991 describes a dispenser comprising a valve forming a projecting collar at the top end of the body. The projecting collar is engaged with a ring which is clamped around the collar. The ring extends around and above the collar.

An object of the present invention is to solve the above-mentioned problems of the prior art by defining a dispenser device whose fixing means do not come into engagement around or above the collar of the body of the pump or of the valve.

To this end, the present invention provides a fluid dispenser device designed to be mounted on the neck of a receptacle, said device comprising a dispensing member, such as a pump or a valve, and fixing means for fixing the dispensing member to the neck of the receptacle, said dispensing member comprising a body whose top end is provided with a collar that projects outwards, said fluid dispenser device being characterized in that the fixing means comprise a substantially cylindrical ring engaged on the body under the collar, said ring being in peripheral leaktight contact with the body by being radially clamped thereon. Advantageously, the ring defines a top end in abutment under the collar. of the fixing means thus does not encase the collar of the body of the dispensing member, but rather it merely comes into abutment against the bottom face of said In addition, sealing is provided between the ring and the body, thereby preventing any leakage therebetween. The neck gasket of such a dispenser device provides sealing between the neck and the ring only, and not between the ring and the body. According to another characteristic of the invention, which may be implemented with or without peripheral sealing, said body also forms at least one outwardly-projecting bulge situated below the collar, the ring being disposed between the collar

CORRECTED SHEET

2a

< 3 ·

5

and said at least one bulge so that the ring is locked therebetween. The ring is thus literally wedged between the collar and the bulge(s). Advantageously, the ring is of height slightly greater than the distance between the bottom face of the collar and the foot of the bulge.

CORRECTED SHEET

the pump as mounted, because the fixing means extend around the collar.

5

10

15

20

25

30

35

An object of the present invention is to solve the above-mentioned problems of the prior art by defining a dispenser device whose fixing means do not come into engagement around or above the collar of the body of the pump or of the valve.

To this end, the present invention provides a fluid dispenser device designed to be mounted on the neck of a receptacle, said device comprising a dispensing member, such as a pump or a valve, and fixing means for fixing the dispensing member to the neck of the receptacle, said dispensing member comprising a body whose top end is provided with a collar that projects outwards, said fluid dispenser device being characterized in that the fixing means comprise a substantially cylindrical ring engaged on the body under the collar, said ring being in peripheral leaktight contact with the body by being radially clamped thereon. Advantageously, the ring defines a top end in abutment under the collar. The ring of the fixing means thus does not encase the collar of the body of the dispensing member, but rather it merely comes into abutment against the bottom face of said collar. In addition, sealing is provided between the ring and the body, thereby preventing any leakage The neck gasket of such a dispenser device therebetween. provides sealing between the neck and the ring only, and not between the ring and the body. According to another characteristic of the invention, which may be implemented with or without peripheral sealing, said body also forms at least one outwardly-projecting bulge situated below the collar, the ring being disposed between the collar and said at least one bulge so that the ring is locked therebetween. The ring is thus literally wedged between the collar and the bulge(s). Advantageously, the ring is of height slightly greater than the distance between the bottom face of the collar and the foot of the bulge.

Thus the ring is forced by the rising slope(s) of the bulge(s) against the bottom face of the collar. It can thus be said that the ring of the fixing means is genuinely snap-fastened to the body of the pump or of the valve.

In one embodiment, the bulge extends over the entire periphery of the body so as to form an outwardly projecting bead. In a variant, a plurality of localized bulges are provided that are distributed around the periphery of the body.

The ring may be made of metal or of plastic. Preferably, when the ring is made of metal, the free top end of the ring is provided with an inside bevel to make it easier for the ring to pass over the bulge. This prevents any damage from being done to the body of the pump or of the valve as the free end of the ring passes over it.

According to another characteristic, the ring is extended at its bottom end by a radial flange serving to come into abutment against the neck of the receptacle with a gasket being interposed. In addition, the radial flange is extended downwards by a socket suitable for being crimped, screwed, or snap-fastened onto the neck of the receptacle.

The invention is explained more fully below with reference to the accompanying drawings which give two embodiments of the invention by way of non-limiting example.

In the drawings:

5

10

15

20

35

Figure 1 is a vertical section view through a dispenser device in a first embodiment;

Figure 1a is an enlarged view of a detail outlined in Figure 1;

Figure 2 is a vertical section view through a dispenser device in a second embodiment; and

Figure 2a is an enlarged view of a detail outlined in Figure 2.

The first embodiment shown in Figures 1 and 1a differs from the second embodiment shown in Figures 2 and 2a mainly in that the fixing means of the first embodiment are made of metal whereas the fixing means of the second embodiment are made of molded plastic.

5

10

15

20

25

30

With reference to any of the figures, the fluid dispenser device of the invention comprises two main component parts, namely a dispensing member 1, which may be a pump or a valve, and fixing means 2 for fixing the dispensing member 1 to the neck of a receptacle (not shown).

Since the internal structure of the dispensing member is not critical for the present invention, it is not described at all below. Externally, the dispensing member comprises a body 10 underlying an actuating rod 11 which is mounted to move inside the body 10 to actuate the dispensing member. In addition, the body 10 is provided with a collar 12 which projects radially outwards at its top end. Below the collar, the body is cylindrical.

The fixing means comprise a ring 20 which is in the form of a cylindrical segment. In the invention, the ring 20 is engaged on the body 10 so as to generate peripheral sealing around the body. This may be achieved by radial clamping by forming at least one segment of the ring 20 with an inside diameter slightly smaller than the outside diameter of the body. It is thus possible to ensure that the ring is fixed securely to the body, and, in addition, to avoid any risk of leakage between the ring and the body. Advantageously, the top end 201 of the ring comes into abutting contact with the bottom face 121 of the collar 12. The pump cannot therefore by pushed in through the ring.

According to another characteristic of the
invention, the body 10 is also provided with one or more
bulges 13 that project radially outwards, and that are
situated below the collar 12 at a distance of a few

and a

5

10

15

20

25

30

35

millimeters therefrom. The bulge 13 may be in the form of a continuous bead that extends over the entire periphery of the body 10. In a variant, there may be a plurality of bulges 13 in the form of localized projections advantageously distributed uniformly around the periphery of the body. Between the bulges 13 and the collar 12, the pump body forms a cylindrical segment.

The ring is of height such that it is in abutment at its top end 201 under the collar, and engaged via its bottom end with the one or more bulges 13 as can be seen in Figures 1a and 2a. Advantageously, the height of the ring 20 is slightly greater than the distance between the bottom face 121 of the collar 12 and the foot P of at least one bulge 13 so that the bottom end of the ring 20 is urged by the rising slope(s) of the bulge(s) 13 against the bottom face 121 of the collar 12, thereby improving the stability of the ring 20 on the body 10. More particularly, when the fixing means are made of metal, it may be advantageous for the top end of the ring 20 to be provided with an inside bevel 203 to make it easier for the ring to pass over the bulge(s) 13, and thereby to avoid any damage being done either to the bulges or to the body 10. Naturally, such a bevel may also be provided on fixing means made of molded plastic. In practice, a metal ring has a height that is slightly less than the height of a ring made of plastic because the metal ring has smaller deformation. As can be seen in Figure 2a, the bottom end of the ring 20 extends to the vicinity of the outermost point of the bulge 13 by means of its material being deformed slightly, whereas the bottom end of the metal ring shown in Figure 1a extends only very slightly beyond the foot P of the bulge 13 in order to avoid any deformation of the body 10.

Conventionally, the fixing means include a radial flange that extends outwards and that serves to come into abutment against the neck of the receptacle, with a gasket 3 being interposed. This radial flange 21 is

-

5

10

15

20

connected to the bottom end of the ring 20. Around its outside periphery, the radial flange 21 is extended downwards by a socket 22 serving to be crimped onto the neck of the receptacle when the fixing means are made of metal, or to be screwed or snap-fastened onto the neck of the receptacle when the fixing means are made of molded plastic.

It should be noted that the collar 12 abuts against the top end 201 of the ring 20 so that it is impossible for the body 10 to become disengaged from the ring 20 when actuating the dispensing member by pressing on the actuating rod 11. This offers an advantage over prior art techniques, in which the collar 12 of the dispensing member is snap-fastened from below in a recess so that it is possible for the dispensing member to be disengaged from the recess in the fixing means by pressing strongly on the actuating rod. Such a risk is completely avoided with the present invention.

It can also be noted that the bulge 13 may be implemented on the body 10, and that the ring may be held in place between the collar and the bulge without leaktight contact being established between the ring and the body.

CLAIMS

- 1/ A fluid dispenser device designed to be mounted on the
 neck of a receptacle, said device comprising a dispensing
 member (1), such as a pump or a valve, and fixing means
 5 (2) for fixing the dispensing member to the neck of the
 receptacle, said dispensing member comprising a body (10)
 whose top end is provided with a collar (12) that
 projects outwards, said fluid dispenser device being
 characterized in that the fixing means comprise a
 10 substantially cylindrical ring (20) engaged on the body
 (10) under the collar, said ring (20) being in peripheral
 leaktight contact with the body by being radially clamped
 thereon.
- 2/ A fluid dispenser device according to claim 1, in which the ring (20) defines a top end (201) in abutment under the collar (12).
- 3/ A fluid dispenser device according to claim 1 or 2, in which said body (10) also forms at least one outwardly-projecting bulge (13) situated below the collar (12), the ring (20) being disposed between the collar (12) and said at least one bulge (13) so that the ring is locked therebetween.

25

4/ A fluid dispenser device according to claim 3, in which the ring (20) is of height slightly greater than the distance between the bottom face (121) of the collar (12) and the foot (P) of the bulge (13).

30

- 5/ A fluid dispenser device according to claim 3 or 4, in which the bulge (13) extends over the entire periphery of the body so as to from an outwardly projecting bead.
- 35 6/ A fluid dispenser device according to claim 3 or 4, in which a plurality of localized bulges (13) are provided that are distributed around the periphery of the body.

C+ •

- 7/ A fluid dispenser device according to any preceding claim, in which the ring (20) is made of metal.
- 5 8/ A fluid dispenser device according to any one of claims 3 to 7, in which the ring (20) is made of plastic.
- 9/ A fluid dispenser device according to any preceding claim, in which the free top end (201) of the ring (20)

 10 is provided with an inside bevel (203) to make it easier for the ring (20) to pass over the bulge (13).
- 10/ A fluid dispenser device according to any preceding claim, in which the ring (20) is extended at its bottom end by a radial flange (21) serving to come into abutment against the neck of the receptacle with a gasket (3) being interposed.
- 11/ A fluid dispenser device according to claim 8, in
 20 which the radial flange (21) is extended downwards by a
 socket (22) suitable for being crimped, screwed, or snapfastened onto the neck of the receptacle.

ABSTRACT

A DISPENSER DEVICE HAVING A FITTED FIXING RING

A fluid dispenser device designed to be mounted on the neck of a receptacle, said device comprising a dispensing member (1), such as a pump or a valve, and fixing means (2) for fixing the dispensing member to the neck of the receptacle, said dispensing member comprising a body (10) whose top end is provided with a collar (12) that projects outwards, said fluid dispenser device being characterized in that the fixing means comprise a substantially cylindrical ring (20) engaged on the body (10) under the collar, said ring (20) being in peripheral leaktight contact with the body by being radially clamped thereon.

20

5

10

15

25


30


Translation of the title and the abstract as they were when originally filed by the 35 Applicant. No account has been taken of any changes that may have been made subsequently by the PCT Authorities acting ex officio, e.g. under PCT Rules 37.2, 38.2, and/or 48.3.

WO 01/19703

PCT/FR00/02516

1/2

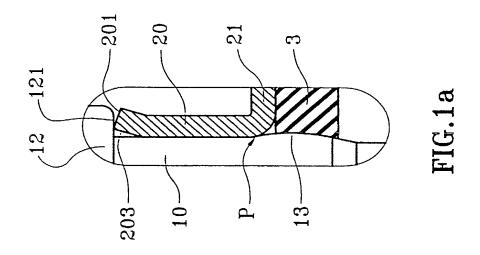

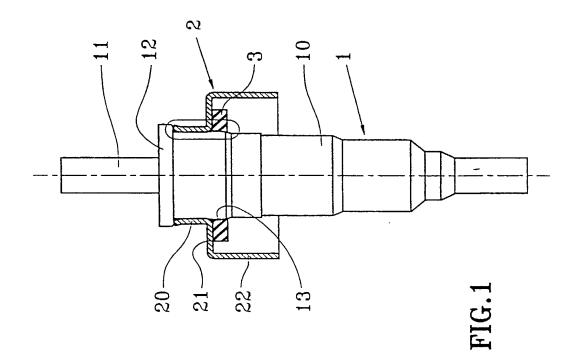

RAY, et al.

A DISPENSER DEVICE HAVING A FITTED FIXING RING
Filed March 14, 2002
Robert J. Seas, Jr

2 of 2


2 072


2 202-293-7060

PCT/FR00/02516

2/2

₩O 01/19703

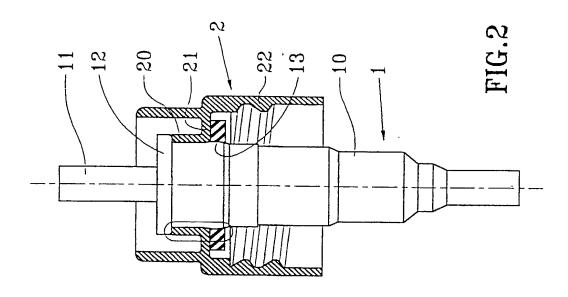

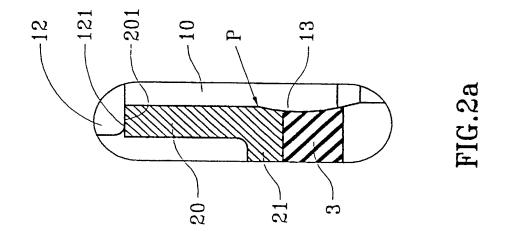

Declaration and Power of Attorney for Patent Application

Déclaration et pouvoirs pour demande de brevet

French Language Declaration

En tant que l'inventeur nommé ci-après, je déclare par le As a below named inventor, I hereby declare that: présent acte que : Mon domicile, mon adresse postale et ma nationalité sont ceux My residence, mailing address and citizenship are as stated next figurant ci-dessous à côté de mon nom. to my name. Je crois être le premier inventeur original et unique (si un seul I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if nom est mentionné ci-dessous), ou l'un des premiers coplural names are listed below) of the subject matter which is inventeurs originaux (si plusieurs noms sont mentionnés ciclaimed and for which a patent is sought on the invention dessous) de l'objet revendiqué, pour lequel une demande de brevet a été déposée concernant l'invention intitulée entitled A DISPENSER DEVICE HAVING A FITTED **FIXING RING** the specification of which is attached hereto unless the et dont la description est fournie ci-joint à moins que la case following box is checked: suivante n'ait été cochée : was filed on September 12, 2000 a été déposée le sous le numéro de demande des Etats-Unis ou le numéro as United States Application Number or PCT International Application Number de demande international PCT _ (n° de confirmation _____) PCT/FR00/02516 (Conf. No.) et modifiée le and was amended on (le cas échéant). (if applicable). I hereby state that I have reviewed and understand the contents

Je déclare par le présent acte avoir passé en revue et compris le contenu de la description ci-dessus, revendications comprises, telles que modifiées par toute modification dont il aura été fait référence ci-dessus.

Je reconnais devoir divulguer toute information pertinente à la brevetabilité, comme défini dans le Titre 37, § 1.56 du Code fédéral des réglementations.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56.

of the above identified specification, including the claims, as

amended by any amendment referred to above.

French Language Declaration

Je revendique par le présent acte avoir la priorité étrangère, en vertu du Titre 35, § 119(a)-(d) ou § 365(b) du Code des Etats-Unis, sur toute demande étrangère de brevet ou certificat d'inventeur ou, en vertu du Titre 35, § 365(a) du même Code, sur toute demande internationale PCT désignant au moins un pays autre que les Etats-Unis et figurant ci-dessous et, en cochant la case, j'ai aussi indiqué ci-dessous toute demande étrangère de brevet, tout certificat d'inventeur ou toute demande internationale PCT ayant une date de dépôt précédant celle de la demande à propos de laquelle une priorité est revendiquée.

I hereby claim foreign priority under Title 35, United States Code, § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below, and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Prior foreign application(s Demande(s) de brevet ante		<u>D</u>	roit de priorité	ty Claimed revendiqué No/Non
99/11501	France	September 15, 1999	\boxtimes	
(Number) (Numéro)	(Country) (Pays)	(Day/Month/Year Filed) (Jour/Mois/Année de dépôt)		_
(Number) (Numéro)	(Country) (Pays)	(Day/Month/Year Filed) (Jour/Mois/Année de dépôt)		
35, § 119(e) du Code des	ent acte tout bénéfice, en vertu du Titre Etats-Unis, de toute demande de brevet tats-Unis et figurant ci-dessous.	I hereby claim the benefit under Title § 119(e) of any United States provisibelow.		
(Application No.) (N° de demande)	(Filing Date) (Date de dépôt)			
(Application No.) (N° de demande)	(Filing Date) (Date de dépôt)			
35, § 120 du Code des E effectuée aux Etats-Unis, même Code, de toute den Etats-Unis et figurant ci-d chacune des revendication divulgué dans la demande PCT, en vertu des dispos 35, § 112 du Code des Et toute information pertinen le Titre 37, § 1.56 du Cod pu disposer entre la date of	ent acte tout bénéfice, en vertu du Titre tats-Unis, de toute demande de brevet ou en vertu du Titre 35, § 365(c) du nande internationale PCT désignant les essous et, dans la mesure où l'objet de la decette demande de brevet n'est pas antérieure américaine ou internationale citions du premier paragraphe du Titre ats-Unis, je reconnais devoir divulguer te à la brevetabilité, comme défini dans e fédéral des réglementations, dont j'ai de dépôt de la demande antérieure et la nde nationale ou internationale PCT de	I hereby claim the benefit under Title § 120 of any United States application PCT International application design listed below and, insofar as the subjectaims of this application is not disciplated by the first paragraph of Title 35, Uniacknowledge the duty to disclose inforto patentability as defined in Title Regulations, § 1.56 which became available of the prior application and International filing date of this applicat	on(s), or § 365 ating the Uni- ect matter of e losed in the pro- in in the manne- ited States Cod rmation which e 37, Code (ailable between the national	(c) of any ted States, each of the rior United or provided le, § 112, I is material of Federal of the filing
PCT/FR00/02516 (Application No.) (N° de demande)	September 12, 2000 (Filing Date) (Date de dépôt)	(Status: patented, pending, abandoned) (Statut: breveté, en cours d'examen, ab		
(Application No.) (N° de demande)	(Filing Date) (Date de dépôt)	(Status: patented, pending, abandoned) (Statut: breveté, en cours d'examen, ab		
à ma connaissance, véridie	cte que toute déclaration ci-incluse est, que et que toute déclaration formulée à	I hereby declare that all statements r knowledge are true and that all statements	ents made on ir	formation

Je déclare par le présent acte que toute déclaration ci-incluse est, à ma connaissance, véridique et que toute déclaration formulée à partir de renseignements ou de suppositions est tenue pour véridique; et de plus, que toutes ces déclarations ont été formulées en sachant que toute fausse déclaration volontaire ou son équivalent est passible d'une amende ou d'une incarcération, ou des deux, en vertu de la Section 1001 du Titre 18 du Code des Etats-Unis, et que de telles déclarations volontairement fausses risquent de compromettre la validité de la demande de brevet ou du brevet délivré à partir de celle-ci.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

French Language Declaration

POUVOIRS: je désigne par les présentes tous avocats de SUGHRUE MION, PLLC énumérés sous le Numéro de Client USPTO figurant ci-après comme mes avocats pour poursuivre la présente procédure et traiter avec l'Office des brevets et des marques (*Patent and Trademark Office*) toute affaire en liaison avec celle-ci, reconnaissant formellement que les avocats spécifiques énumérés sous ce Numéro de Client peuvent être modifiés à tout moment, à la discrétion exclusive de Sughrue Mion, PLLC, et demande que toute correspondance relative à la demande soit adressée à l'adresse mentionnée sous le même Numéro USPTO.

POWER OF ATTORNEY: I hereby appoint all attorneys of SUGHRUE MION, PLLC who are listed under the USPTO Customer Number shown below as my attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, recognizing that the specific attorneys listed under that Customer Number may be changed from time to time at the sole discretion of Sughrue Mion, PLLC, and request that all correspondence about the application be addressed to the address filed under the same USPTO Customer Number.

23373 23373

Adresser tout appel téléphonique à : (nom et numéro de téléphone)

SUGHRUE MION, PLLC +1 (202) 293-7060

Direct Telephone Calls to: (name and telephone number)

SUGHRUE MION, PLLC +1 (202) 293-7060

Nom complet de l'unique ou premier inventeur Dany RAY	Full name of sole or first inventor	
Signature de l'inventeur Date 30/07/08	Inventor's signature	Date
Domicile 11, rue des Grès 78820 TUZIERS - FRANCE	Residence	
Nationalité Française	Citizenship	
Adresse postale same as domicile	Mailing Address	
Nom complet du deuxième co-inventeur, le cas échéant Franck PLESSIS	Full name of second joint inventor, if any	
Signature du deuxième inventeur Date 30/07/2002	Second inventor's signature	Date
Domicile 12, rue Henri Dunant 27110 LE NEUBOURG - FRANCE	Residence	
Nationalité FRX	Citizenship	
Adresse postale	Mailing Address	